

VW Seat Covers

IMPORTANT MESSAGE – These seat covers are NOT suitable for seats containing AIRBAGS!

In order to fit your VW T5 seat covers, you may be required to remove your seats from your van or remove the bulkhead.

If you are in any way unsure about what is required to do this, we advise that you ask a professional to undertake the work, or we offer a low cost fitting service if you prefer to bring your vehicle to us.


Also before starting to fit the seats, remove all headrests from the seats.

We hope that you enjoy your new VW seat covers and that they give your VW the look that you hoped for and provide you with many miles of happy motoring.


Important Disclaimer:

We check every kit for quality and fitment, all fastenings such as zips, straps and ties are tested before sale. Our seats are designed for easy DIY fitment, however the fitter is to take care in reading and following the instructions. The zips, straps and ties on these seat covers are not designed to pull the seat covers into position, the fitter should ensure the vinyl covers are in the correct position before using the zips, straps or ties. Using the zips straps or ties incorrectly and using them to force the vinyl covers in to place can result in the breakage of zips, straps and ties. GTE takes no responsibility for breakages of zips, straps and ties due to fitter negligence, however we can provide a repair service for a small fee.

THANK YOU FOR YOUR PURCHASE!

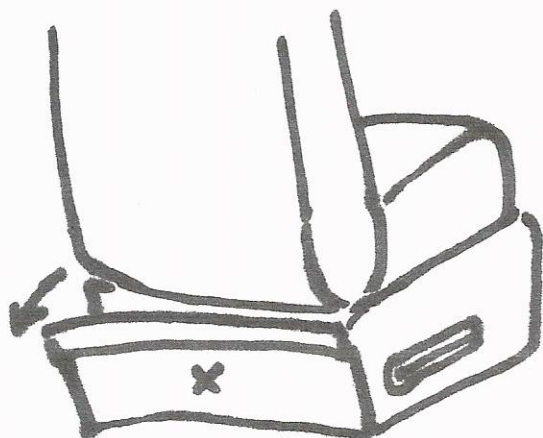

Remove Plastic trim from the back of the drivers seat

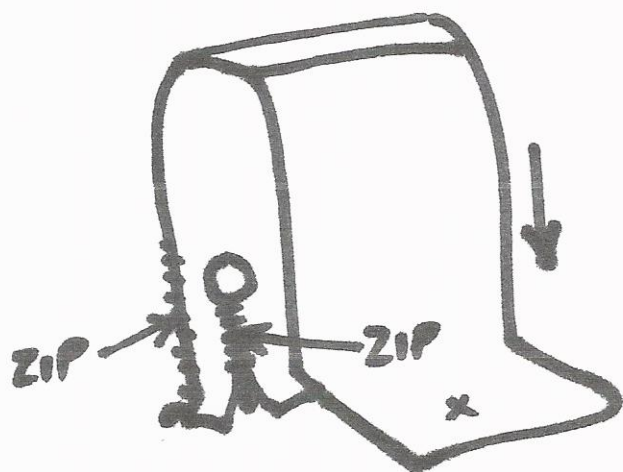


Pull the drivers backrest cover down over the backrest and zip all the zips down, start with the armrest hole zips and then do the rear corner zips. Ensure not to use the zip to try and pull the material tight as this could break the zip itself, instead pull the material together before zipping it up which will then hold everything in place. Tuck the zips into the plastic trim on the seat.




Pull the material over the headrest eyelets on top of the seat, start by tucking the material under the front of the eyelet and then push the rest over the top until it is all tucked in under the eyelets.




Push the bottom of the front cover through the gap between the base and the backrest and then pull it tight from behind the seat before you Velcro it to the back of the cover to hold it tightly in place.

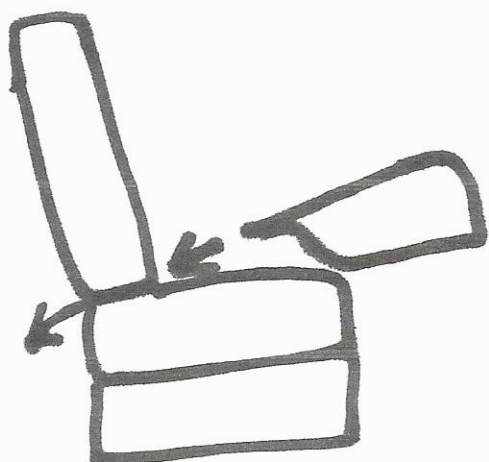


Push the Drivers seat base cover through the gap between the base and the backrest, then pull the front corners of the cover over the front of the seat and pull the cover tight from behind the seat.

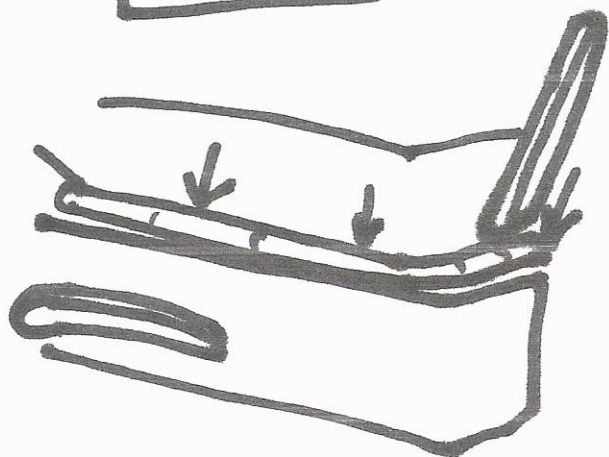


Use the black fitting tool to tuck the foam edge of the cover into the plastic covers around the sides of the drivers seat.

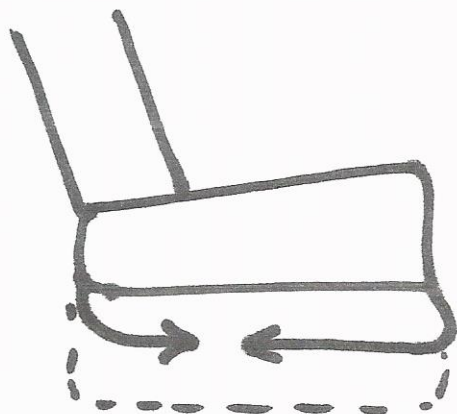

Pull the straps under the seat and do up the buckles pulling them tight, but be careful not to over tighten as this may cause damage to the stitching.

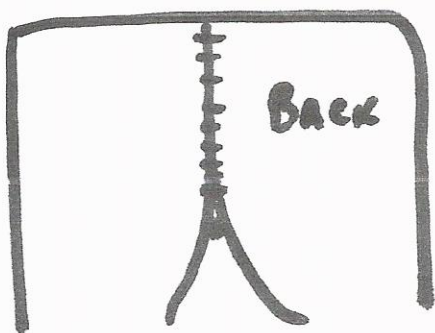


Undo the zip up the back of the cover and feed the cover under the middle seat belt, then pull the seat belt slack in order to then pull the passenger side seat backrest cover down over the backrest, pull it down tight and do the zip down the back of the back rest. Ensure the cover is pulling tight by hand so the zip can be done up easily, do not use the zip to pull the cover tight as this could break the zip, please ensure the material is pulled together first so the zip can be easily zipped up.

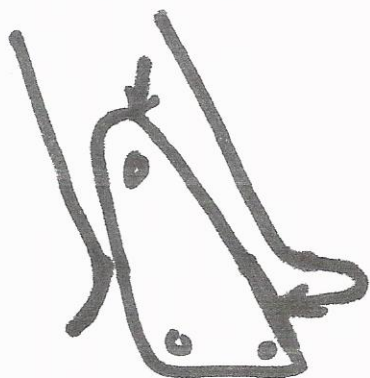


Ensure the cover is tucked behind the brackets on the side of the seat on both sides, then pull the passenger seat base out and then put the front of the backrest cover under the backrest so it can be pulled tight from behind before you Velcro it in place.



Pull the material over the headrest eyelets on top of the seat, start by tucking the material under the front of the eyelet and then push the rest over the top until it is all tucked in under the eyelets. Also ensure that the cover is tucked in underneath the seat belt mounting on top of the seat.

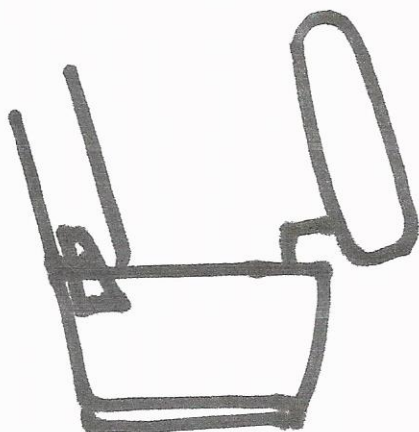


With the passenger seat base lifted up, fit the passenger seat base cover and pull it down around the edge all the way around, then pull the draw strings tight under the U shaped cut out for the seat belts and tie them off to hold the cover tightly in place. Again be careful not to over tighten as this may cause damage to the cover.

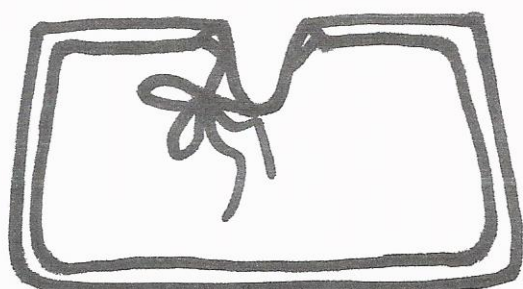




Pull the headrest cover onto the headrest ensuring the with the elastic strap going to the front of the headrest.

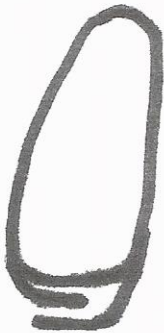

Do up the Velcro underneath the headrests making sure the cover is pulled on nice and tight.

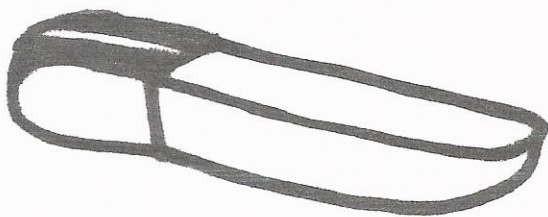

Pull the armrest covers on nice and tightly all the way ensuring the elastic strap is on the outside of the armrest, then once on the elastic strap can be pulled around the back of the armrest to help hold it in place.